

300 Cloverleaf Road, York, PA 17406

www.aaronenterprises.com

717-854-2641

Project: New Morgan Relocation

Location: Morgantown, PA

Project Details:

8" and 12" pipes abandoned in place were to be grouted off. The topography and clearing costs along the 6,800 LF right of way made long distance grouting the most cost advantageous. A cement bentonite grout mix was designed as the fill material. The crew used a Schwing concrete pump to fill the two continuous 6,800 LF runs from one location.

Final Product: 6,800 LF of 12" pipe filled with grout, 6,800 LF of 8" pipe filled with grout



Grouting

Completion Date

November 2020


Installation Methods:

Grouting

Markets Served:

Oil & Gas

Heavy Civil Construction

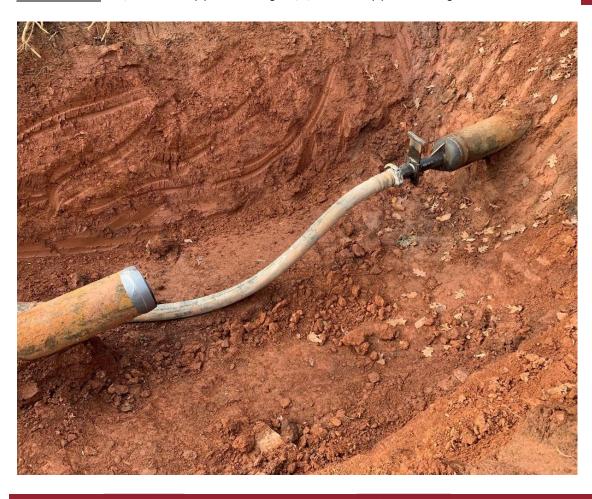







Owner: Engineer: Contractor:

Energy Transfer, Inc. STV, Inc. Otis Eastern Services, LLC.

For More Information:

Robert L. McDowell, PE - Project Manager - (717) 854-2641 ext. 230 Reference Job # 2023626

