AARON Enterprises INC.

300 Cloverleaf Road York, PA 17406
Office: (717) 854-2641
Fax: (717) 854-2310
www.aaronenterprises.com

Project: CPS Energy Loop 610 & I-10

Location: San Antonio, TX

Project Details:

Aaron Enterprises, Inc. was contracted to complete four auger bores in San Antonio, TX to relocate a 16" gas main for an upcoming highway project. A total of 450 LF of boring was completed, with individual bores ranging from 80 to 175 feet. The pipe was installed in hard limestone with known karst features using a 16" hammer. Voids were encountered during drilling, requiring grouting of the annular space to meet highway specifications. The project was executed on a 24/7 schedule due to necessary closures of highway on/off ramps.

Final Product: 16” Steel Gas Main

Geology: Karst Limestone

Project Profile

Auger Boring

Completion Date

February 2022

Installation Methods:


Auger Boring
Grouting

Markets Served:

Transportation
Oil & Gas





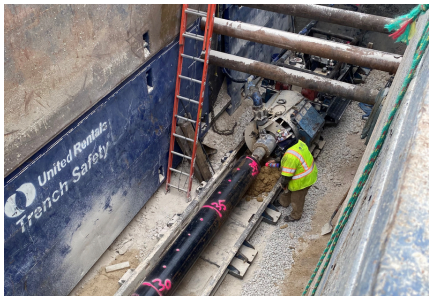



Owner:	Engineer:	Contractor:
CPS Energy	CEC	Mears

For More Information:

Paul Grove - Vice President - (717) 854-2641 ext. 243
Reference Job # 2132326

AARON Enterprises INC.